




ASIA MACHINES



**POWER SHEARING HYDRAULIC (VARIABLE RACK ANGLE TYPE)**

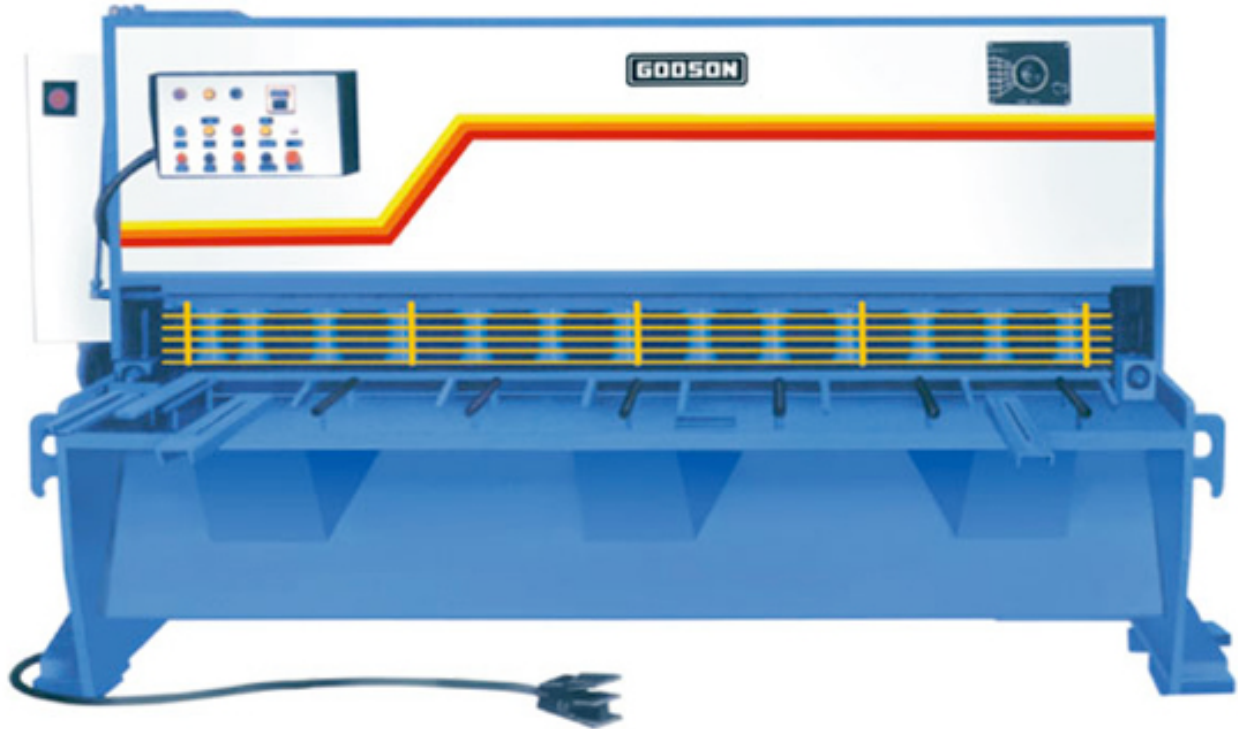

**Godson** Shearing Machine are constructed sturdily and designed for accuracy and dependability by employment of latest technology and experience.

**Cutting Capacity:** To cut mild steel of tensile strength 42 kg./mm<sup>2</sup> only.

**Standard Equipments:** Variable Rack Angle adjustment with selector switch \* Hydraulic Hold Downs \* Rapid Blade clearance adjustment \* Front Gauge \* Main Electric Control Panel \* Front operator control box \* Movable foot switch \* Four Edge interchangeable shear blade \* Operation and maintenance manual

**TECHNICAL SPECIFICATION**

MODEL	CAPACITY			RAKE ANGLE RANGE (Degree)	No. OF STROKES		NO. OF HOLD DOWN	LENGTH OF BACK GAUGE M.M.	HOLDING FORCE (Kgs.)	MOTOR (HP/KW)	OVERALL DIMENSION		
	WIDTH	RAKE ANGLE			MAX. ANGLE RANGE	MIN. ANGLE RANGE					Lengt.	Width	Height
		NOMI.	MAX.										
HS-1	1600	4	6	0.5 - 3	15	30	9	600	4500	7.5 / 5.5	2300	1500	1800
HS-2	2000	4	6	0.5 - 3	15	30	11	600	6200	7.5 / 5.5	2500	1500	1950
HS-3	2500	4	6	0.5 - 3	10	25	13	600	8000	7.5 / 5.5	3000	1500	1950
HS-4	3000	4	6	0.5 - 3	10	24	16	600	10000	10 / 7.5	3500	1600	1950
HS-5	1600	6	8	0.5 - 3	10	20	9	600	6600	10 / 7.5	2300	1600	1800
HS-6	2000	6	8	0.5 - 3	15	30	11	600	7000	15 / 11	2500	1600	1950
HS-7	2500	6	8	0.5 - 3	10	24	13	600	8500	15 / 11	3000	1600	1950
HS-8	3000	6	8	0.5 - 3	10	24	16	600	10800	15 / 11	3500	1600	1950
HS-9	1600	8	10	0.5 - 3	8	17	9	600	10500	10 / 7.5	2300	2050	1950
HS-10	2000	8	10	0.5 - 3	10	20	11	600	12500	20 / 15	2500	2050	2150
HS-11	2500	8	10	0.5 - 3	9	20	13	600	16300	20 / 15	3000	2050	2150
HS-12	3000	8	10	0.5 - 3	8	18	16	600	18500	20 / 15	3500	2050	2150